




KEYNOTES

- 1 6" VERTICAL CURB AND GUTTER PER DETAIL 1/CD1.1
- 2 6" REVERSE PAN VERTICAL CURB AND GUTTER PER DETAIL 2/CD1.1
- 3 CURB TERMINUS PER DETAIL 3/CD1.1
- 4 PEDESTRIAN RAMP TYPE "C4" PER DETAIL 4/CD1.1 WITH DETECTABLE WARNING DOMES PER ISPC SD-712
- 5 SIDEWALK RAMP PER DETAIL 5/CD1.1
- 6 DETECTABLE WARNING DOMES PER ISPC SD-712
- 7 PARKING LOT ASPHALT PAVING PER DETAIL 6/CD1.1
- 8 ARTERIAL ASPHALT PAVING PER DETAIL 7/CD1.1
- 9 4"-WIDE YELLOW PARKING STRIPING
- 10 THRU ARROW PER ACHD STANDARD DETAIL TS-1113.01
- 11 REVEGETATION PER LANDSCAPE PLAN
- 12 24"-WIDE X 9' WHITE LADDER CROSSWALK STRIPING PER ACHD STANDARD DETAIL TS-1112.03, DETAIL #18
- 13 ADA ACCESSIBLE PARKING STALL STRIPING PER DETAIL 1/CD1.2
- 14 ADA ACCESSIBLE PARKING SIGN PER DETAIL 2/CD1.2
- 15 W11-15 AND W16-7PL SIGNS, POST AND MOUNTING PER ACHD STANDARD DETAIL TS-1114.01, SIGN ORIENTED AT 90° TO ROADWAY
- 16 REINSTALL SALVAGED PARKING BUMPER
- 17 CATCH BASIN PER ISPC SD-601
- 18 CURB OPENING INLET PER DETAIL 1/CD1.3
- 19 RIPRAP PER DETAIL 1/CD1.3
- 20 12" ADS N-12 STORM DRAIN PIPE PER DETAIL 3/CD1.2
- 21 INFILTRATION SWALE PER GRADING PLAN AND DETAIL 4/CD1.2
- 22 REMOVE SEDIMENT FROM CULVERT OPENING AND GRADE TO DRAIN PER GRADING PLAN AND DETAIL 2/CD1.5
- 23 ROUND RAIL WOOD FENCE PER DETAIL 1/CD1.4
- 24 CONCRETE SIDEWALK PER DETAIL 2/CD1.4
- 25 EXCAVATE AND PREPARE FOR VAULT RESTROOM INSTALLATION AND BACKFILL AFTER INSTALLATION PER DETAIL 5/CD1.4, VAULT RESTROOM WILL BE PROVIDED AND SET BY OTHERS
- 26 REINSTALL SALVAGED HORSE TRAILER PARKING ONLY SIGN
- 27 REINSTALL SALVAGED RIDGE TO RIVERS SIGN, COORDINATE PLACEMENT WITH PARKS AND RECREATION
- 28 REINSTALL SALVAGED ENJOY YOUR VISIT SIGN, COORDINATE PLACEMENT WITH PARKS AND RECREATION
- 29 REINSTALL SALVAGED THIS TRAIL IS OPEN TO SIGN, COORDINATE PLACEMENT WITH PARKS AND RECREATION
- 30 REINSTALL SALVAGED DOG OWNERS SIGN, COORDINATE PLACEMENT WITH PARKS AND RECREATION
- 31 REINSTALL SALVAGED PET WASTE STATION,, COORDINATE PLACEMENT WITH PARKS AND RECREATION
- 32 LITTER RECEPTACLE PER DETAIL 3/CD1.4, COORDINATE PLACEMENT WITH PARKS AND RECREATION
- 33 REINSTALL SALVAGED DIRECTIONAL TRAIL AHEAD SIGN, COORDINATE PLACEMENT WITH PARKS AND RECREATION
- 34 18" CORRUGATED METAL PIPE PER DETAIL 3/CD1.2
- 35 RE-EXCAVATE TEST PIT TO UNDISTURBED NATIVE SOIL AT 10' ± BELOW GROUND SURFACE AND BACKFILL WITH GRANULAR STRUCTURAL FILL MEETING ISPC SECTION 801 REQUIREMENTS. MOISTURE-COONDITIONED TO NEAR OPTIMUM MOISTURE CONTENT AND COMPACT TO A MINIMUM OF 95% OF THE MAXIMUM DRY DENSITY AS DETERMINED BY ASTM D1557.
- 36 REPAIR PATH WITH ¾" ROAD MIX
- 37 PEDESTRIAN RAMP TYPE "A" PER ISPC SD-712A AS MODIFIED IN PLAN VIEW WITH DETECTABLE WARNING DOMES PER ACHD SUPPLEMENTAL TO ISPC SD-712
- 38 WHEEL STOP PER DETAIL 4/CD1.4
- 39 CONCRETE PAVEMENT PER DETAIL 8/CD1.1
- 40 **BID ADD ALTERNATE 1** ENERGY LIGHT INC 16A4SSH188 CAMERA POLE, S-40 ADA PULL BOX AND FOUNDATION PER DETAIL 1/CD1.5



TRAFFIC SIGN LEGEND

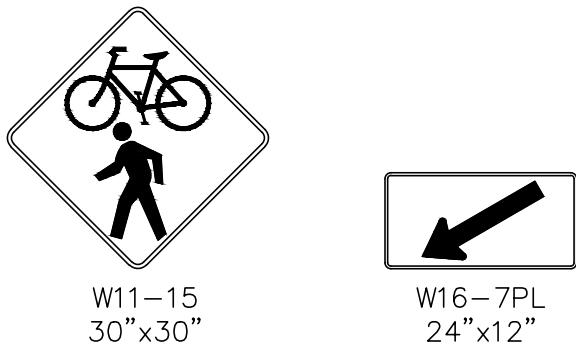

PARKING SPACE COUNT

REGULAR PARKING STALLS: 31
ADA PARKING STALLS: 2
TRAILER PARKING STALLS: 2

DESIGNED BY: RZ			CHECKED BY: RZ
DRAWN BY: RZ			PLOT DATE: 1/6/26
NO.	DATE	BY	REVISION

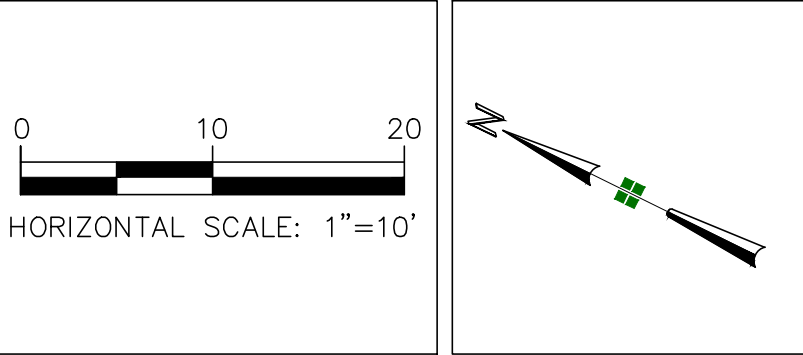

POLECAT/CARTWRIGHT TRAILHEAD
PARKING LOT IMPROVEMENTS
SITE PLAN

QRS PROJECT NUMBER:
3C2501

SITE ADDRESS:
8451 N CARTWRIGHT RD, BOISE, ID 83714

DESIGN PHASE:
90% PLANS



SHEET

C4.0